


## AXIS-R LED

### Individual Gimbal – Square

Cut Out 190x186

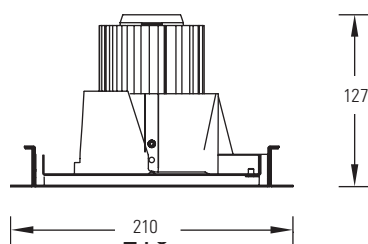

| Catalogue No.      | Colour | Bezel  | Beam Angle   | LED Flux (Lumens) | Luminaire Flux (Lumens) | LED Wattage | Total System Wattage | LL/CW | Colour Temp | CRI |
|--------------------|--------|--------|--------------|-------------------|-------------------------|-------------|----------------------|-------|-------------|-----|
| AXSRF1SW/15/S/4K80 | White  | Square | Spot (17°)   | 1500              | 1468.5                  | 10.4        | 11.6                 | 126.1 | 4000K       | >80 |
| AXSRF1SW/15/M/4K80 | White  | Square | Medium (28°) | 1500              | 1473.0                  | 10.4        | 11.6                 | 126.5 | 4000K       | >80 |
| AXSRF1SW/15/F/4K80 | White  | Square | Flood (62°)  | 1500              | 1477.5                  | 10.4        | 11.6                 | 126.8 | 4000K       | >80 |
| AXSRF1SW/20/S/4K80 | White  | Square | Spot (17°)   | 2000              | 1958.0                  | 14.5        | 16.2                 | 120.6 | 4000K       | >80 |
| AXSRF1SW/20/M/4K80 | White  | Square | Medium (28°) | 2000              | 1964.0                  | 14.5        | 16.2                 | 120.9 | 4000K       | >80 |
| AXSRF1SW/20/F/4K80 | White  | Square | Flood (62°)  | 2000              | 1970.0                  | 14.5        | 16.2                 | 121.3 | 4000K       | >80 |
| AXSRF1SW/30/S/4K80 | White  | Square | Spot (17°)   | 3000              | 2937.0                  | 24.0        | 26.9                 | 109.3 | 4000K       | >80 |
| AXSRF1SW/30/M/4K80 | White  | Square | Medium (28°) | 3000              | 2946.0                  | 24.0        | 26.9                 | 109.6 | 4000K       | >80 |
| AXSRF1SW/30/F/4K80 | White  | Square | Flood (62°)  | 3000              | 2955.0                  | 24.0        | 26.9                 | 109.9 | 4000K       | >80 |

**Colour Temperature:** For colour 3000K, replace '4K' in the catalogue number with '3K': e.g. AXSRF1SW/15/S/3K80


**Colour Rendering:** For CRI 95, replace '80' in the catalogue number with '95': e.g. AXSRF1SW/15/S/3K95

To specify black bezel, replace 'W' in the catalogue number with 'B': e.g. AXSRF1RB/15/S/4K80

To specify silver bezel, replace 'W' in the catalogue number with 'S': e.g. AXSRF1RS/30/S/4K80

### Twin Gimbal

Cut Out 346

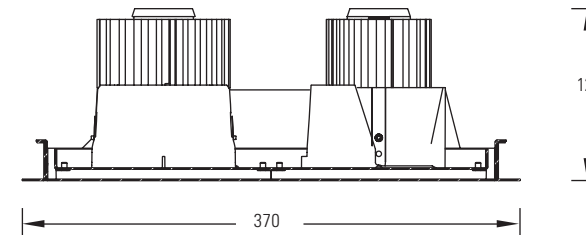

| Catalogue No.      | Colour | Ceiling      | Beam Angle   | LED Flux (Lumens) | Luminaire Flux (Lumens) | LED Wattage | Total System Wattage | LL/CW | Colour Temp | CRI |
|--------------------|--------|--------------|--------------|-------------------|-------------------------|-------------|----------------------|-------|-------------|-----|
| AXSRG2PW/15/S/4K80 | White  | Plasterboard | Spot (17°)   | 3000              | 2937                    | 20.7        | 23.2                 | 126.7 | 4000K       | >80 |
| AXSRG2PW/15/M/4K80 | White  | Plasterboard | Medium (28°) | 3000              | 2946                    | 20.7        | 23.2                 | 127.1 | 4000K       | >80 |
| AXSRG2PW/15/F/4K80 | White  | Plasterboard | Flood (62°)  | 3000              | 2955                    | 20.7        | 23.2                 | 127.5 | 4000K       | >80 |
| AXSRG2PW/20/S/4K80 | White  | Plasterboard | Spot (17°)   | 4000              | 3916                    | 29.0        | 32.5                 | 120.6 | 4000K       | >80 |
| AXSRG2PW/20/M/4K80 | White  | Plasterboard | Medium (28°) | 4000              | 3928                    | 29.0        | 32.5                 | 120.9 | 4000K       | >80 |
| AXSRG2PW/20/F/4K80 | White  | Plasterboard | Flood (62°)  | 4000              | 3940                    | 29.0        | 32.5                 | 121.3 | 4000K       | >80 |
| AXSRG2PW/30/S/4K80 | White  | Plasterboard | Spot (17°)   | 6000              | 5874                    | 48.0        | 53.8                 | 109.3 | 4000K       | >80 |
| AXSRG2PW/30/M/4K80 | White  | Plasterboard | Medium (28°) | 6000              | 5892                    | 48.0        | 53.8                 | 109.6 | 4000K       | >80 |
| AXSRG2PW/30/F/4K80 | White  | Plasterboard | Flood (62°)  | 6000              | 5910                    | 48.0        | 53.8                 | 109.9 | 4000K       | >80 |

**Colour Temperature:** For colour 3000K, replace '4K' in the catalogue number with '3K': e.g. AXSRG2PW/15/S/3K80

**Colour Rendering:** For CRI 95, replace '80' in the catalogue number with '95': e.g. AXSRG2PW/30/S/3K95

To specify black bezel, replace 'W' in the catalogue number with 'B': e.g. AXSRG2PB/15/S/4K80

To specify silver bezel, replace 'W' in the catalogue number with 'S': e.g. AXSRG2PS/15/S/4K80


For 600x600 version for Exposed T Ceilings, replace 'P' in the catalogue number with 'T': e.g. AXSRG2TW/20/S/4K80

For 600x600 version for Spring T Ceilings, replace 'P' in the catalogue number with 'B': e.g. AXSRG2BW/20/S/4K80




## Triple Gimbal

Cut Out 506

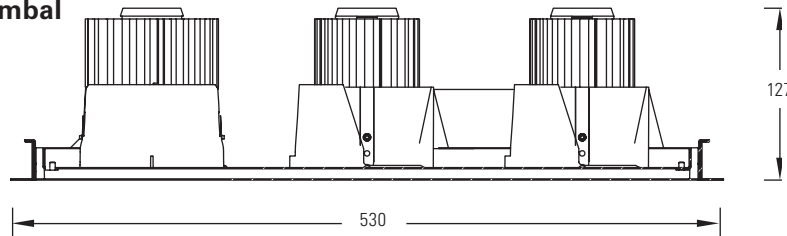

## 4-Way Gimbal

Cut Out 350

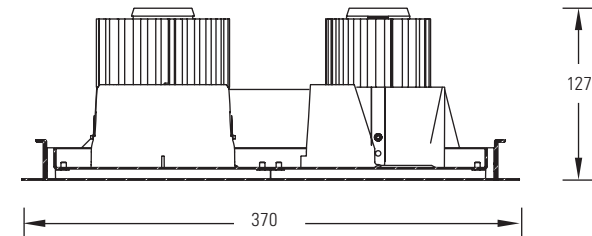

| Catalogue No.      | Colour | Ceiling      | Beam Angle   | LED Flux (Lumens) | Luminaire Flux (Lumens) | LED Wattage | Total System Wattage | LL/CW | Colour Temp | CRI |
|--------------------|--------|--------------|--------------|-------------------|-------------------------|-------------|----------------------|-------|-------------|-----|
| AXSRG3PW/15/S/4K80 | White  | Plasterboard | Spot (17°)   | 4500              | 4405.5                  | 31.0        | 34.7                 | 126.9 | 4000K       | >80 |
| AXSRG3PW/15/M/4K80 | White  | Plasterboard | Medium (28°) | 4500              | 4419.0                  | 31.0        | 34.7                 | 127.3 | 4000K       | >80 |
| AXSRG3PW/15/F/4K80 | White  | Plasterboard | Flood (62°)  | 4500              | 4432.5                  | 31.0        | 34.7                 | 127.7 | 4000K       | >80 |
| AXSRG3PW/20/S/4K80 | White  | Plasterboard | Spot (17°)   | 6000              | 5874.0                  | 43.5        | 48.7                 | 120.6 | 4000K       | >80 |
| AXSRG3PW/20/M/4K80 | White  | Plasterboard | Medium (28°) | 6000              | 5892.0                  | 43.5        | 48.7                 | 120.9 | 4000K       | >80 |
| AXSRG3PW/20/F/4K80 | White  | Plasterboard | Flood (62°)  | 6000              | 5910.0                  | 43.5        | 48.7                 | 121.3 | 4000K       | >80 |
| AXSRG3PW/30/S/4K80 | White  | Plasterboard | Spot (17°)   | 9000              | 8811.0                  | 72.0        | 80.6                 | 109.3 | 4000K       | >80 |
| AXSRG3PW/30/M/4K80 | White  | Plasterboard | Medium (28°) | 9000              | 8838.0                  | 72.0        | 80.6                 | 109.6 | 4000K       | >80 |
| AXSRG3PW/30/F/4K80 | White  | Plasterboard | Flood (62°)  | 9000              | 8865.0                  | 72.0        | 80.6                 | 109.9 | 4000K       | >80 |

**Colour Temperature:** For colour 3000K, replace '4K' in catalogue number with '3K': e.g. AXSRG3PW/15/S/3K80

**Colour Rendering:** For CRI 95, replace '80' in catalogue number with '95': e.g. AXSRG3PW/30/S/3K95

To specify black bezel, replace 'W' in catalogue number with 'B': e.g. AXSRG3PB/15/S/4K80

To specify silver bezel, replace 'W' in catalogue number with 'S': e.g. AXSRG3PS/15/S/4K80

For 600x600 version for Exposed T Ceilings, replace 'P' in the catalogue number with 'T': e.g. AXSRG3TW/20/S/4K80

For 600x600 version for Spring T Ceilings, replace 'P' in the catalogue number with 'B': e.g. AXSRG3BW/20/S/4K80

| Catalogue No.      | Colour | Ceiling      | Beam Angle   | LED Flux (Lumens) | Luminaire Flux (Lumens) | LED Wattage | Total System Wattage | LL/CW | Colour Temp | CRI |
|--------------------|--------|--------------|--------------|-------------------|-------------------------|-------------|----------------------|-------|-------------|-----|
| AXSRG4PW/15/S/4K80 | White  | Plasterboard | Spot (17°)   | 6000              | 5874                    | 41.4        | 46.4                 | 126.7 | 4000K       | >80 |
| AXSRG4PW/15/M/4K80 | White  | Plasterboard | Medium (28°) | 6000              | 5892                    | 41.4        | 46.4                 | 127.1 | 4000K       | >80 |
| AXSRG4PW/15/F/4K80 | White  | Plasterboard | Flood (62°)  | 6000              | 5910                    | 41.4        | 46.4                 | 127.5 | 4000K       | >80 |
| AXSRG4PW/20/S/4K80 | White  | Plasterboard | Spot (17°)   | 8000              | 7832                    | 58.0        | 65.0                 | 120.6 | 4000K       | >80 |
| AXSRG4PW/20/M/4K80 | White  | Plasterboard | Medium (28°) | 8000              | 7856                    | 58.0        | 65.0                 | 120.9 | 4000K       | >80 |
| AXSRG4PW/20/F/4K80 | White  | Plasterboard | Flood (62°)  | 8000              | 7880                    | 58.0        | 65.0                 | 121.3 | 4000K       | >80 |
| AXSRG4PW/30/S/4K80 | White  | Plasterboard | Spot (17°)   | 12000             | 11748                   | 96.0        | 107.5                | 109.3 | 4000K       | >80 |
| AXSRG4PW/30/M/4K80 | White  | Plasterboard | Medium (28°) | 12000             | 11784                   | 96.0        | 107.5                | 109.6 | 4000K       | >80 |
| AXSRG4PW/30/F/4K80 | White  | Plasterboard | Flood (62°)  | 12000             | 11820                   | 96.0        | 107.5                | 109.9 | 4000K       | >80 |

**Colour Temperature:** For colour 3000K, replace '4K' in the catalogue number with '3K': e.g. AXSRG4PW/15/S/3K80

**Colour Rendering:** For CRI 95, replace '80' in the catalogue number with '95': e.g. AXSRG4PW/30/S/3K95

To specify black bezel, replace 'W' in the catalogue number with 'B': e.g. AXSRG4PB/15/S/4K80

To specify silver bezel, replace 'W' in the catalogue number with 'S': e.g. AXSRG4PS/15/S/4K80

For 600x600 version for Exposed T Ceilings, replace 'P' in the catalogue number with 'T': e.g. AXSRG4TW/20/S/4K80

For 600x600 version for Spring T Ceilings, replace 'P' in the catalogue number with 'B': e.g. AXSRG4BW/20/S/4K80