
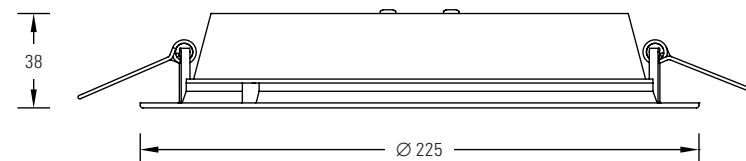
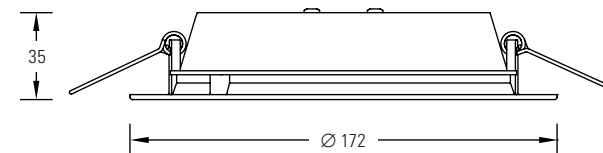


PEBBLE

LED

A family of recessed circular shallow IP44 downlights, ideal for areas with shallow ceiling void. Available in three different sizes, with a remote fixed output driver and opalised cover.

- Ideal for use in areas with shallow ceiling voids.
- IP 44 rated.
- Available in different sizes – 145mm, 172mm and 225mm diameters.
- Colour temperature – available in 4000K version.
- Finished white as standard.
- Predicted lifetime > 50,000 hours.
- No ultra violet or infra red emissions.
- Photometric data available in Eulumdat format on request or via Relux website.
- Standard ITAB Prolight LED warranty (see page 193).

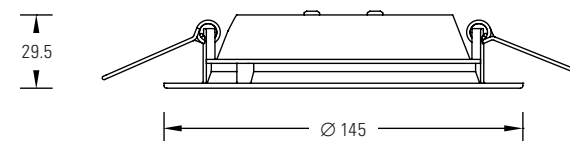

Catalogue No.	LED Flux	Total System Wattage	Luminaire Lumens / Circuit Watt	Colour Temp	CRI	Cut Out Dia. (mm)
PEB1/F/09/4K	950	12.5	76	4000K	>80	125
PEB2/F/15/4K	1560	22.0	71	4000K	>80	150
PEB3/F/23/4K	2300	29.0	79	4000K	>80	200